


PATENT COOPERATION TREATY
PCT
INTERNATIONAL PRELIMINARY REPORT ON PATENTABILITY
(Chapter II of the Patent Cooperation Treaty)
(PCT Article 36 and Rule 70)

Applicant's or agent's file reference M80740379	FOR FURTHER ACTION	See Form PCT/IPEA/416
International application No. PCT/AU2004/001266	International filing date (<i>day/month/year</i>) 17 September 2004	Priority date (<i>day/month/year</i>) 1 October 2003
International Patent Classification (IPC) or national classification and IPC Int. Cl. ⁷ B22D 17/20, B22D 45/00		
Applicant CAST CENTRE PTY LTD et al		

1. This report is the international preliminary examination report, established by this International Preliminary Examining Authority under Article 35 and transmitted to the applicant according to Article 36.
2. This REPORT consists of a total of 3 sheets, including this cover sheet.
3. This report is also accompanied by ANNEXES, comprising:
 - a. ☒ (*sent to the applicant and to the International Bureau*) a total of 24 sheets, as follows:
 - ☐ sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications authorized by this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions).
 - ☐ sheets which supersede earlier sheets, but which this Authority considers contain an amendment that goes beyond the disclosure in the international application as filed, as indicated in item 4 of Box No. I and the Supplemental Box.
 - b. ☐ (*sent to the International Bureau only*) a total of (indicate type and number of electronic carrier(s)) , containing a sequence listing and/or table related thereto, in computer readable form only, as indicated in the Supplemental Box Relating to Sequence Listing (see Section 802 of the Administrative Instructions).

4. This report contains indications relating to the following items:

<input checked="" type="checkbox"/>	Box No. I	Basis of the report
<input type="checkbox"/>	Box No. II	Priority
<input type="checkbox"/>	Box No. III	Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
<input type="checkbox"/>	Box No. IV	Lack of unity of invention
<input checked="" type="checkbox"/>	Box No. V	Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
<input type="checkbox"/>	Box No. VI	Certain documents cited
<input type="checkbox"/>	Box No. VII	Certain defects in the international application
<input type="checkbox"/>	Box No. VIII	Certain observations on the international application

Date of submission of the demand 29 July 2005	Date of completion of the report 5 August 2005
Name and mailing address of the IPEA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaaustralia.gov.au Facsimile No. (02) 6285 3929	Authorized Officer  SERINEL SAMUEL Telephone No. (02) 6283 2382

Box No. I Basis of the report

1. With regard to the language, this report is based on the international application in the language in which it was filed, unless otherwise indicated under this item.
- ☐ This report is based on translations from the original language into the following language which is the language of a translation furnished for the purposes of:
- ☐ international search (under Rules 12.3 and 23.1 (b))
 - ☐ publication of the international application (under Rule 12.4)
 - ☐ international preliminary examination (under Rules 55.2 and/or 55.3)
2. With regard to the elements of the international application, this report is based on (*replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report*):
- ☐ the international application as originally filed/furnished
- ☒ the description:
- pages 2,5,16,20 as originally filed/furnished
- pages* 1,3,4,4A,6-15A,17-19 received by this Authority on 29 July 2005 with the letter of 27 July 2005
- pages* received by this Authority on with the letter of
- ☒ the claims:
- pages as originally filed/furnished
- pages* as amended (together with any statement) under Article 19
- pages* 21-25 received by this Authority on 29 July 2005 with the letter of 27 July 2005
- pages* received by this Authority on with the letter of
- ☒ the drawings:
- pages 1-3, 5-15 as originally filed/furnished
- pages* 4 received by this Authority on 29 July 2005 with the letter of 27 July 2005
- pages* received by this Authority on with the letter of
- ☐ a sequence listing and/or any related table(s) - see Supplemental Box Relating to Sequence Listing.
3. ☐ The amendments have resulted in the cancellation of:
- ☐ the description, pages
 - ☐ the claims, Nos.
 - ☐ the drawings, sheets/figs
 - ☐ the sequence listing (*specify*):
 - ☐ any table(s) related to the sequence listing (*specify*):
4. ☐ This report has been established as if (some of) the amendments annexed to this report and listed below had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).
- ☐ the description, pages
 - ☐ the claims, Nos.
 - ☐ the drawings, sheets/figs
 - ☐ the sequence listing (*specify*):
 - ☐ any table(s) related to the sequence listing (*specify*):

* If item 4 applies, some or all of those sheets may be marked "superseded."

Box No. V Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**1. Statement**

Novelty (N)	Claims 1-25	YES
	Claims Nil	NO
Inventive step (IS)	Claims 1-25	YES
	Claims Nil	NO
Industrial applicability (IA)	Claims 1-25	YES
	Claims Nil	NO

2. Citations and explanations (Rule 70.7)

D1 EP 0930114
D2 US 6425433
D3 US 5586596
D4 US 4577670
D5 GB 855495

Novelty (N) & Inventive Step (IS) claims 1-25

The amended claims are novel and inventive as none of the cited prior art discloses a vent assembly in which the distribution rail to the vent chamber could be said to be connected to the base of each of the chill faces or vent sections of the vent chamber. Therefore the subject matter of these claims is new and meets the requirements of Article 33(2) PCT with regard to novelty and is not obvious and meets the requirements of Article 33(3) PCT with regard to inventive step.

Industrial Applicability (IA)

The invention defined in the claims is considered to meet the requirements of Industrial Applicability under Article 33(4) of the PCT because it can be made by, or used in, industry.

Venting Assembly for a Casting Mould

Field of the Invention

This invention relates to a venting assembly for a die casting mould and in particular, to a venting system for high pressure die casting systems.

5 Background to the Invention

In pressure die casting systems, the moulding material is forced under high pressure into the mould. To enable the moulding material to occupy all of the mould, the air in the mould must be evacuated either prior to, or during the material injection step. One problem which occurs particularly in a high pressure die casting (HPDC) process
10 for the production of metal products is that gas is often trapped in isolated regions of the mould. The entrapped gas forms porosity in the castings that can result in rejects and/or make them unsuitable for heat treatment.

A common practice in the industry to eliminate gas entrapment is to apply a vacuum to the mould during cavity filling. In the cold chamber process of HPDC, cavity
15 filling takes place within a few seconds to tens of milliseconds. As effective gas evacuating time is only a few seconds, the amount of gas evacuated will depend upon the efficiency of the vacuum system applied.

A critical component of the vacuum system is a venting system or vacuum valve which opens to apply vacuum to the cavity, and later closes to prevent metal entering
20 the vacuum valve mechanism and the vacuum supply system. The efficiency of the vacuum system depends on the type of vacuum valve used. In a simple vacuum system the valve is shut off before molten metal enters the cavity. During the time after the valve shuts off air can be drawn back into the cavity through parting faces in the die.

Other types of valves such as those of US 5,488,985 assigned to Fondarex S.A.
25 are mechanically closed by the metal pressure built up during the final stages of cavity filling. This type of valve is much more efficient than the simple vacuum

The document DE19500005 discloses a design of an angled chill vent. Unlike a conventional chill vent, the disclosed apparatus comprises a number of nearly parallel chill vent surfaces positioned substantially perpendicular to the die parting face. Each pair of parallel chill vent surfaces defines a separate vent chamber with each chamber
5 connected to a common runner system. Hence there are a number of separate vent chambers connected in nearly parallel. With this arrangement, the venting area is substantially increased by placing more than one vent in a limited space with an insignificant increase of the projected area. Since the flow of molten metal is terminated in the corrugated gap upon solidification, no mechanical shut off is required and
10 therefore no moving parts are involved.

The present invention provides a venting assembly, which has improved performance by having increased surface area without the usual consequence of an increase in projected area of the die when compared with the conventional chill vent. The vent assembly of the present invention is simple to manufacture, has reduced
15 maintenance costs and reduced downtime when compared with existing vacuum valves.

Summary of the Invention

In one aspect, the invention provides a vent assembly for a high pressure die casting system comprising

20 a vent chamber comprising a plurality of vent sections,
an inlet for the vent chamber comprising a distribution rail, connecting to the base of each vent section and

a pair of opposed chill blocks having corresponding chill surfaces defining the vent chamber therebetween, each of the chill surfaces comprising a plurality of
25 adjoining chill faces, each chill face extending the length of the vent chamber, each chill face having a corresponding chill face on the paired chill block defining one of the plurality of vent sections therebetween, the plane of each chill face being oriented at an angle to an adjoining chill face across the width of the respective chill block to define at least one protruding wedge received in a corresponding shaped recess of the pair chill

block, the adjoining chill faces forming at least one wedge and recess being joined across the width of the vent chamber.

It is preferable that an adjoining chill face on a respective block is substantially equidistant from the chill face of the corresponding chill block defining the respective
5 section of the vent chamber.

In the context of this invention, the orientation angle of one face with respect to an adjoining face is referenced with respect to the position of the first face. Hence adjoining faces side by side in a common plane are at an orientation of 180° .

In a preferred form of the invention, the orientation of the adjoining chill faces is
10 greater than 90° and preferably equal to or greater than 95° to the adjoining face. This gives the chill blocks a wedge shaped appearance with a single protruding wedge on one chill block being received in a corresponding shaped recess in the other of the paired chill blocks.

The respective chill faces of the chill blocks defining a section of the continuous
15 vent chamber are spaced from one another along the length of the continuous vent chamber. This provides a continuous vent chamber.

The vent assembly comprises a distribution rail extending across the vent chamber, the distribution rail comprising a conduit connecting the base of each section of the continuous vent chamber, such that when the distribution rail is connected to the
20 outlet of the die, the distribution rail is aligned with the parting face of the die. Preferably the distribution rail is integrally formed in the chill blocks.

By having a continuous vent chamber defined by a plurality of paired chill faces oriented at an angle to an adjoining face, pressure forces normal to the paired chill surfaces have only a small resultant component that is normal to the die parting face. In
25 this way, the flow area for removal of air from the die cavity can thus be greatly increased without proportionally increasing the separation forces experienced by the die parts.

4A

In a preferred form of the invention, at least one of the chill blocks comprises a plurality of block modules, each module fitting with an adjoining module and combining with the paired chill block to define a vent section of the vent chamber, the plurality of adjoining modules forming a continuous vent chamber with the paired chill block.

- 5 By producing at least one of the chill blocks from a number of modules, the chill vent can be readily assembled and disassembled.

In a further preferred form of the invention, both of the paired chill blocks

depressed to be flush with the surface of the vent chamber. This pin ejector assists with the removal of metal casting from the vent chamber at the time of die opening.

The vent chamber may further be provided with a sealable secondary port. The sealable secondary port being connectable to a source of compressed gas. The
5 compressed gas may be blown into the secondary port to remove or dislodge debris from the vent chamber between cycles of casting production.

The invention further provides an apparatus for forming a solid product from a molten material comprising the vent assembly described above.

10 In a second aspect, the invention provides an apparatus for forming a solid product from a molten material, the apparatus having a vent assembly, the vent assembly comprising

two block structures, a first of said block structures having at least one
15 extending member which engages with at least one corresponding recess in the second block structure, the engaged block structures forming a continuous vent chamber defined between the faces of the extending member and the faces of the corresponding recess of the block structures, the faces of the extending
member and corresponding faces of the recess of the block structures defining
vent sections of the vent chamber which join across the width of the vent
chamber, the vent assembly further comprising

20 an inlet for the vent chamber, the inlet comprising a distribution rail extending the width of the vent chamber connecting to the base of each vent section.

In a preferred form of this aspect, at least one extending member comprises a
pair of wedge main faces aligned to each other at a taper angle to form a thin end and a
thick end of said wedge-shaped member, a wedge end face extending between the
25 wedge main faces at said thin end of the wedge-shaped member.

The corresponding recess is accordingly a wedge-shaped recess having:

a pair of recess main faces aligned to each other at said taper angle to form a

thin end and a thick end of said recess, and

a recess end face extending between the recess main faces at said thin end of the recess,

Hence the block structures engage such that the wedge main faces oppose
5 corresponding recess main faces and the wedge end face oppose the recess end face, and define a continuous vent chamber therebetween.

Preferably the solid product is formed of metal. Preferably the apparatus is a metal die casting apparatus.

The vent assembly is connectible to a source of vacuum and is used to prevent
10 molten metal ingress into the vacuum system.

The surface of said faces, where said vent chamber is present, may have a corrugated surface. The corrugated surface may have a zigzag or serrated form or may have a sinusoidal form.

The vent assembly preferably includes a fluid temperature control gallery internal
15 to each of said block structures.

A vent assembly according to the present invention differs from a conventional chill vent in that the main faces of the invention are at an angle, rather than parallel, to the die parting face. This more readily allows a limited space to have more than one vent aperture from the die cavity so as to increase the venting area without substantially
20 increasing the die space. Moreover, the increase in the venting area does not increase the projected area of the die, since the main faces of the vent are at an angle to the die parting face. The present invention provides greater flow area for removal of gases from a die cavity.

In another aspect the invention provides a method of casting or moulding
25 a material in a cavity of a die, comprising the steps of:

connecting the cavity to a vent assembly by way of a first conduit,

connecting a vacuum source to the vent assembly by way of a second conduit wherein the vent assembly comprises two block structures, the first of the block structures having at least one extending member defining chill faces which engage with a corresponding recess on the second block structure, the engaged block structures forming a vent chamber within the vent assembly, the faces of the extending member and corresponding faces of the recess of the block structures defining vent sections of the vent chamber which join across the width of the vent chamber, the vent assembly further comprising

an inlet for the vent chamber, the inlet comprising a distribution rail extending the width of the vent chamber connecting to the base of each vent section;

evacuating gas from the cavity through the first conduit vent assembly and second conduit to the vacuum source;

injecting a quantity of melt of said material into the cavity to fill the cavity, the quantity of metal at least being sufficient to fill the cavity;

permitting a portion of the quantity of the material to flow from the cavity from the first conduit into the vent assembly to solidify the material therein the material flowing into at least the base of each vent section such that the solidified material seals the vent assembly and/or first conduit;

opening the die and vent assembly by separating portions of the die and the vent assembly in a first direction;

ejecting the solidified material from the cavity and the vent assembly.

Brief Description of the Drawings

In order that the invention may be more fully understood there will now be described, by way of example only, preferred embodiments and other elements of the invention with reference to the accompanying drawings where:

Figure 1 is a simplified representation of high pressure die casting (HPDC) apparatus 10 for the cold chamber process as currently in commercial use;

Figure 2 is a perspective view of a chill block of a venting apparatus according to

a first embodiment of the invention;

Figure 3 is a perspective view of a first module of the chill block of Figure 2;

Figure 4 is a perspective view of the first and second modules of the chill block of Figure 2;

5 Figure 5 is a perspective view of the first, second and third modules of the chill block of Figure 2;

Figure 6 is a perspective view of a pair of chill block according to Figure 2 assembled in accordance with the first embodiment of the invention;

10 Figure 7 is a perspective view of opposed first block modules of paired chill blocks of Figure 6;

Figure 8 is a perspective view of opposed first and second block modules of paired chill blocks of Figure 2;

Figure 9 is a perspective view of opposed first, second and third block modules of pair chill blocks of Figure 2.

15 Figure 10 is a perspective view of a formation 502 that would arise if the gas flow passage within the assembly shown in Figure 9 is filled with metal, the orientation of the formation being the same as that of Figure 9;

Figure 11 is a perspective view of the formation 502 as viewed from a more elevated position;

20 Figure 12 is a perspective view of the formation 502 as viewed from slightly above horizontal;

Figure 13 is a perspective view of a typical formation 602 that is created by metal cooling in the assembly 453 during use;

25 Figure 14 is a perspective view of an assembly forming part of a chill vent apparatus according to a second embodiment of the present invention; and

Figure 15 is a rear perspective view of the embodiment of Figure 14; and

Figure 16 is a perspective view of the cover shown in Figure 14; and

Figures 17(a) and 17(b) illustrate the ejector pin used in an embodiment of the invention; and

Figure 18 illustrates a dust removal adaption of a further embodiment of the invention.

Detailed Description of Examples of the Invention

Referring to Figure 1, the HPDC apparatus 10 comprises a die 12 comprising a fixed half die 14 and a moving half die 16 which are brought into mutual engagement by fluid actuated rams (not shown). The half dies 14 and 16 separate along a parting face 18. The half dies in engagement form a casting cavity 20 therebetween which has the shape of the product wished to be cast.

Molten metal is introduced to the cavity 20 by means of a high pressure injection system wherein metal is fed through a pour hole 22 into a shot sleeve 24 and a piston 26 on a plunger 28 first closes the pour hole 22 and then, in the same stroke, forces the desired amount of molten metal from the shot sleeve 24 through a runner 30 into the cavity 20. At the opposite end of the cavity a vent hole 32 allows gases and excess metal to escape the cavity.

Before molten metal is introduced to the cavity 20, the air in the cavity is evacuated through the vent hole 32 by means of a vacuum supply in a tank 34 connected to the vent hole 32 by way of a vacuum line 37 containing a solenoid actuated isolating valve 36 and a vacuum valve 38 of one of the types discussed earlier in this specification. For simple vacuum systems the effective evacuating time is only a few seconds and is set by the travel time of the plunger 28 from covering the pour hole to the change-over position.

The vent assembly according to one embodiment of the invention is shown in Figure 6. The vent assembly comprises a first block structure 450 engaged with a second block structure 452. The first block structure is preferably made up of a plurality of modules 50, 100, 150, 200 and the second block structure 452 is made up with second block modules 250, 300, 350, 400. As best shown in Figures 6-9, the modules of the first and second block structures are interengaged to form a modular unit. As will become apparent from the detailed description below, the engagement of the paired block structures 450, 452 provides a continuous vent chamber to be formed between

the opposed chill surfaces of the block members. Each of the chill surfaces comprises a plurality of adjoining chill faces which interconnect and extends the length of the vent chamber.

As best shown in Figures 2-5, the first block structure comprises modules 50, 100, 150 and 200. Each of these modules is in the form of a face plate.

The first main face plate 150 has an L-shaped frame portion 155 and a tapered engagement portion 157. The frame portion 155 has parallel opposed faces 159 and 160 (face 160 being hidden from view in the Figures) by which the plate 150 mates with corresponding parallel faces on neighbouring portion 200 and plate 100 respectively. The extending member portion 157 has a plurality of adjoining chill faces. In the embodiment shown, the extending member is wedge shaped, having a pair of wedge main faces 162 and 163 (face 163 being hidden from view in the Figures) aligned to each other at a taper angle 164 and 165 of about 10° (identified on Figure 10). The extending member 157 has a thin end 166 at its end face 170 and a thick end 168 where it joins the frame portion 155.

Each wedge main face 162 and 163 has top face portion 172 and 173 respectively, which is flat, and a lower face portion 174 and 175 respectively which carries corrugations 176 having a serrated form (saw tooth cross section) on its surface. Each corrugation 176 extends along its respective face 162 and 163 from the thin end 166 to the thick end 168.

The end face 170 also carries horizontally extending corrugations 184 which each join corresponding corrugations on faces 162 and 163 to create an array of continuous ribs each rib extending across one main face 162, then across the end face 170, then across the other main face 163.

One leg of the L-shaped frame portion 155 forms a substantial fastening portion 180 extending upwards in the illustrations. The other, smaller, leg forms a base portion 182 of the frame portion and extends only halfway along the engagement portion 157.

The first end plate main portion 50 is similar to the first main face plate 150

except that it has an angled and corrugated face 62 on only one side while its opposite face 63 is flat and parallel to faces 159 and 160.

5 The first narrow face plate 100 has an L-shaped frame portion 105 like the frame portion 155 of plate 150 but, instead of having a tapered engagement portion like portion 157 of plate 150, the first narrow face plate 100 has an end face 136 carrying serrated ripples like those of face 170 of the first main face plate 150.

The second end plate mating portion 200 is similar to the first narrow face plate 100 except that it carries no corrugations and the holes 202 and 203 are recessed to accommodate bolt heads (not shown).

10 The first end plate main portion 50, the first narrow face plate 100, the first main face plate 150 and the second end plate mating portion 200 are firmly bolted together in the configuration shown in Figure 2 to create a first block structure 450. A pair of fastening bolts (not shown) for this purpose pass through holes 52, 102, 152 and 202 and through holes 53, 103, 153 and 203 respectively.

15 As best shown in Figure 6, the second end plate main portion 400, the second narrow face plate 350, the second main face plate 300 and the first end plate mating portion 250 are substantially the same as the first end plate main portion 50, the first narrow face plate 100, the first main face plate 150 and the second end plate mating portion 200 respectively (although a significant difference is that the corrugations are of
20 opposite phase). They are firmly bolted together by bolts passing through holes 252, 302, 352 and 402 and through holes 253, 303, 353 and 403 respectively to create a second block structure 452.

25 Two threaded holes 188 and 189 in the top face 154 of plate 150 lead to a gallery for flow of temperature control fluid within the first main face plate 150 and the holes 188 and 189 provide an inlet and outlet respectively for the temperature control fluid. Similar pairs of holes 338, 339, 88, 89, 438 and 439 are provided in plate 300 and portions 50 and 400 respectively. A hole 341, blanked off at its outer end, provides gallery communication between holes 338 and 339. A corresponding blanked-off hole 441 provides communication between temperature control fluid holes 438 and 439, and

corresponding holes (not shown) are also provided to link holes 88 and 89 and holes 188 and 189 to form respective temperature control fluid flow galleries.

5 The block structures 450 and 452 mate together to create a chill vent body 453 in which the extending member portion 307 of the second main face plate 300 is a wedge-shaped member engaged with a wedge-shaped recess 477 formed by opposed faces 62, 136 and 163. Similarly, the extending member portion 157 of the first main face plate 150 is a wedge-shaped member engaged with a wedge-shaped recess formed by opposed faces of plates 300 and 350 and portion 400.

10 The first block structure 450 is securely fastened to the moving half die of the HPDC apparatus by way of bolts (not shown) extending through holes 142 and 192 in the frame portion 105 and the frame portion 155 respectively. Similarly the second block structure 452 is securely fastened to the fixed half die of the HPDC apparatus by way of bolts (not shown) extending through holes 342 and 392 in the second main face plate 300 and the second narrow face plate 350 respectively. Thus in use, the block
15 structures 450 and 452 separate from each other in the same direction as the die halves separate.

Thus when engaged, the chill faces, the lower corrugated surface portion on wedge faces 62, 136, 163, 162, 170 of the first block structure define one wall of a continuous vent chamber 460. Each of the chill faces 62, 136, 163, 162, 170 has a
20 corresponding chill face on the second block structure to define the opposed wall of the vent chamber. The chill faces of the corresponding modules or face plates are equidistantly spaced over the height of the chill face for that section of the vent chamber. In fact, if the corrugations are ignored, the faces are planar and the chill faces of corresponding modules in a section of the vent chamber are substantially parallel.
25 Hence the width of the vent chamber is substantially the same along its length. As each of the chill faces of the first block structure are at an angle to an adjoining chill face, the vent chamber has a number of interconnected non aligned vent sections extending the length thereof. This orientation ensures that the forces normal to the chill faces exerted by the molten metal, do not all act in the same direction and act against one another to
30 some extent. In fact, components of these normal forces over the length of the vent chamber are in opposite directions and hence act against one and do not act to

separate the chill blocks.

While the opposed flat surfaces make a sealing contact when the structures are pressed together, there is a gap between all of the opposed rippled surfaces to provide a convoluted chamber 460 for capture and solidification of metal exiting the die cavity

5 20.

Holes 140 (Figure 4) and 390 (Figure 6) are provided through the fastening portions 130 and 380 of narrow face plates 100 and 350 respectively for connection to a vacuum supply. The holes 140 and 390 open into the upper portion of chamber 460.

Ejector pins 454 (Figure 7) and 455 (Figure 9) are provided in the second block
10 structure 452 to facilitate clean removal of the solidified metal from the chamber 460. As best shown in Figures 17(a) and 17(b), the pins 470 have a hard-stop rod 473 on the back and are actuated by springs 471 which locate into respective sockets 456 and 457. The tip of the pin 455 partially touches the face plate 150 at the engagement portion 157 and partially exposes to chamber 460 when the two blocks 450 and 452 are
15 pressed together. As the molten metal enters the chamber 460 and exerts a force on the pin tip, the base 472 of the hard-stop rod 473 abuts the base of socket 456, 457. In this position, the head of pin 470 is flush with the surface of the vent chamber 460. Once the chill blocks are separated, the pin 470 under the action of spring 471 pushes the solidified metal away from the surface of the vent chamber and returns to its
20 unloaded position shown in Figure 17(b).

A threaded hole 193 is provided in the top face 154 of plate 150, and a threaded hole 343 is provided in the top face 304 of plate 300, whereby lifting means may be attached to facilitate lifting of the chill vent body 453.

The chill vent body assembly 453 (Figure 6) is positioned in relation to the die in
25 use such that the vent hole 32 of the die is held adjacent the vent inlet 464. The inlet 464 leads to a distribution rail 466 which in turn connects with the lowermost edge of each of the gaps or vent sections.

In use air is evacuated from the vent chamber 460 through the holes 140 and

390 after the two structures are pressed together in engaged contact. The holes 140 and 390 are sufficiently distant from the vent inlet 464 for all the molten metal entering the chamber 460 to solidify before the level of metal reaches the holes 140 and 390.

5 The formation 502 shown in Figures 10 to 12 illustrates the shape of the convoluted vent chamber 460 and comprises an array 504 of five corrugated panels 510, 520, 530, 540 and 550 arranged sequentially in an edge to edge relationship. Three of the panels, namely panels 510, 530 and 550, are substantially larger than the other two panels 520 and 540 which link them. Panels 510, 530 and 550 are also linked across the centres of their bottom edges 511, 531, and 551 by a distribution runner 566
10 formed by filling of the distribution rail 466.

Panels 520 and 540 lie parallel to the runner 566 while the panels 510, 530 and 550 are angled at about 95° to panels 520 and 540. The array 504 of panels is thus arranged in an S-shape. Panels 510, 530 and 550 are aligned at an angle of about 5° to the direction (marked X-X on Figures 6 and 11) in which the block structures 450 and
15 452 separate.

The panels 510, 520, 530, 540 and 550 would be formed by filling of the convoluted gap between opposed rippled surfaces on the block structures 450 and 452. For example panel 530 would be formed by filling of the gap between faces 163 and 312 on the first main face plate 150 and the second main face plate 300 respectively.

20 The formation 602 shown in Figure 13 is an incomplete version of the formation 502 shown in Figure 10 and is created because the amount of molten metal which exits from the vent hole 32 in the die is insufficient to fill the vent chamber in the chill vent body, and is thus insufficient to produce the fully formed formation 502. It can be seen that the distribution runner 666 is fully formed (i.e. the same as runner 566 described
25 above) as a result of the distribution rail 466 being completely filled. However metal has only partly filled the panel portions of vent chamber 460, to produce panels 610, 620, 630, 640 and 650 which are incomplete versions of panels 510, 520, 530, 540 and 550 as the top portions are missing.

15A

Surface coatings may be applied to the corrugated surfaces in order to improve their performance. Suitably a titanium nitride coating may be provided to prevent metal and other material sticking to the corrugated surfaces. It can also manipulate thermal transfer between the chill blocks and solidifying metal and is expected to increase the life of the chill face surface. Additionally the roughness of the corrugated surfaces may be enhanced in order to improve their performance.

consistently ran for six days without failure. This proved the robustness of the invented device. The casting quality produced in the trial has been checked. It has achieved the same quality as that from the normal production. Sensors were installed in the machine to monitor the performance of the invented device. The same level of vacuum in the die cavity was achieved in the trial as when using the commercial valve.

A further embodiment of the invention is shown in Figures 14-16. The embodiment provides a chill vent apparatus having two block structures brought together much as described above in relation to the first embodiment, but which adds a case 712 around the block structures and improves the sealing between the two blocks.

10 The two block structures are generally the same. The block 710 has a surrounding case 712 fabricated from steel and having a rectangular box-like configuration with an open face. Four inserts (namely an endplate main portion 720, a narrow face plate 740, a main face plate 760 and a plate mating portion 780) are bolted together as described above and the case 712 is bolted onto its block structure. The case 712 includes end

15 walls 714, 715 and top section 717.

The main face plate 760 is located towards the centre of the inserts. It is tapered in the manner of the tapered extending member portion 157 described above. Wedge faces 762 and 764 on respective obverse sides of the insert 760 each carry an array of corrugations 768. The end face 766 is also provided with corrugations thereon and in

20 this respect is substantially the same as the tapered extending member portion 157 of the first embodiment.

The endplate main portion 720 has an angled corrugated face 724 on one main face and a flat main face 722 on the obverse side. Its end face does not have corrugations thereon. The flat main face bears snugly against an end wall 713 of the

25 case 712 and the corrugated face 724 is angled at about 5° to the flat main face 722.

The narrow face plate 740 is angled on its top face 742 to engage with a mating block.

The end plate mating portion 780 has a flat face on its side bearing against the

end wall 714 of the box, and is angled on its top face 782 to engage with downwardly facing face 728 on a mating block.

When two blocks 710 are mated together for use, angled faces 724, 762, 764 and end faces 766 and 726 form a continuous vent chamber.

5 The case 712 provides a flat shut off face when the two blocks are brought together, while the first embodiment of this invention as described above relies on three angled faces (172, 173 etc) and four flat faces to shut off, which is very difficult from engineering point of view. The case is further provided with seal grooves 730, 732
10 extending around the end walls 714, 715 and top section 717. The grooves are made with an undercut. Rubber strips (not shown) are embedded into the groove. The rubber in the groove 730 perfectly seals the gap when the two blocks are pressed together. The rubber strip in the groove 732 seals the air leak between the bolted inserts (720, 740, 760 and 780) and the case 712. The bore holes 735 enable temperature control fluid pipes (not shown) threaded to the holes 88, 89 and 188, 189 as described above to
15 pass through the case 712 to connect to the temperature control fluid source.

A significant benefit of using a case 712 to contain the components is that it can serve to reduce air leakage into the chamber 460 when vacuum is applied.

During use, dust (a mixture of lubricant and metal flash) is generated in the casting process and sticks to the corrugated surface of the chill faces. This build up of
20 dust over time blocks the passage of gas flow and thus decreases venturing efficiency. Air blow is integrated into the top section 717 of the case 712. The gas blow comprises of the nozzle holes 736, the distribution chamber (hidden from the surface of the drawing and its end is shown by the two small holes at the rear of 717 in Fig 15 and is blocked off at the end), and the threaded holes (the holes next to 735) connecting to the
25 air source.

In the embodiment shown in Figure 18, the dust holes are replaced by extendible dust nozzles 800 which extend into the recess of the chill blocks. These nozzles are extendible by a means such as adjusting the gas pressure in the nozzle tube and allow

gas to be blown through outlets 810 in nozzle head 805 to any position on the chill faces to remove the dust mentioned above. When not in use, nozzles may be bias by a spring in sleeve 802 to return to a retracted position either against or within case 760.

5 Whilst the above description includes the preferred embodiments of the invention, it is to be understood that many variations, alterations, modifications and/or additions may be introduced into the constructions and arrangements of parts previously described without departing from the essential features or the spirit or ambit of the invention.

10 For example, although the embodiments described above have the chill vent connected to a vacuum, the use of a vacuum is not essential. The chill vent may be used without a vacuum connection and testing has shown that in such a configuration the chill vent is 3 to 4 times more efficient than a conventional chill vent.

15 Also, the embodiments described have a taper angle 164 and 165 of about 10° but the exact angle is not particularly important providing the block structures 450 and 452 fit together neatly and the draft angle is sufficient to reliably achieve ejection of the formation 502. The wedge shape is not even limited to a sharp angle. Furthermore angles 164 and 165 could be different to each other.

20 The end faces 136 and 170 are described as having corrugations covering them completely. However these faces may carry corrugations on only some or even none of their surfaces.

The corrugated end faces 136 and 170 have been described as substantially planar, and joining the wedge main faces (eg. faces 162 and 163) at respective edges 194 and 195. Alternatively the end faces (such as end face 170) may be curved, and may be cured so far that they blend into the main faces (eg. faces 162 and 163) without
25 or with minimal edges 194 and 195.

The corrugations may be any convenient shape but an abrupt zigzag

CLAIMS

1. A vent assembly for a high pressure die casting system comprising

a vent chamber comprising a plurality of vent sections,

an inlet for the vent chamber comprising a distribution rail, connecting to
5 the base of each vent section and

a pair of opposed chill blocks having corresponding chill surfaces defining
the vent chamber therebetween, each of the chill surfaces comprising a plurality
of adjoining chill faces, each chill face extending the length of the vent chamber,
each chill face having a corresponding chill face on the paired chill block defining
10 one of the plurality of vent sections therebetween, the plane of each chill face
being oriented at an angle to an adjoining chill face across the width of the
respective chill block to define at least one protruding wedge received in a
corresponding shaped recess of the pair chill block, the adjoining chill faces
forming at least one wedge and recess being joined across the width of the vent
15 chamber.

2. The vent assembly of claim 1, wherein at least one of the chill blocks
comprises a plurality of block modules, each block module fitting with an
adjoining module and combining with the paired chill block to define a section of
the vent chamber, the plurality of adjoining modules forming a continuous vent
20 chamber with the paired chill block.

3. The vent assembly of claim 1, wherein both of the paired chill blocks
comprise a plurality of block modules, the modules of each block fitting with an
adjoining module and combining with modules of the paired chill block to define a
section of the vent chamber, the plurality of adjoining modules of each chill block
25 defining a continuous vent chamber between the pair of chill blocks.

4. The vent assembly of claim 1, wherein the chill faces of the chill blocks
have a corrugated surface.

5. The venting assembly of claim 1, wherein the width of the vent chamber is constant along the length thereof.

5 6. The vent assembly of claim 1, wherein the vent chamber is provided with an inlet that is connected to the outlet of a die casting die, such that when the inlet is connected to the die, the distribution rail is aligned with the parting face of the die.

7. The vent assembly of claim 1, wherein the vent chamber is provided with a vacuum port and is connectable to a vacuum source.

10 8. The venting assembly of claim 7, wherein the chill blocks are able to seal against each other so that the vent chamber and therefore the die cavity, is able to retain a high level of vacuum during the cavity filling of molten material.

9. The venting assembly of claim 1, wherein the chill blocks are provided with holes for the passage of fluid to control the chill blocks' temperature, the holes being connectable to a source of temperature control fluid.

15 10. The venting assembly of claim 1, wherein a housing is provided for the chill blocks, the housing having a vacuum port connectable to a source of a vacuum and communicating with the vent chamber between the chill blocks.

11. The venting assembly of claim 10, wherein the housing is provided in two parts, each part receiving a respective chill block.

20 12. The venting assembly of claim 11, wherein a seal is provided between the two parts of the housing to seal the chill blocks within the housing.

13. The vent assembly of claim 1, wherein the chill blocks are provided with a pin ejector for assisting with the removal of solidified metal from the vent passage.

14. The vent assembly of claim 13, wherein the pin ejector comprises a depression port and a pin extending the length of the depression port, the pin being biased to extend beyond the interior surface of the vent chamber and being able to be depressed flush with the surface of the vent chamber.

5 15. The venting assembly of claim 1, wherein the vent chamber is further provided with a sealable secondary port, the sealable secondary port being connectable to a source of compressed gas.

16. An apparatus for forming a solid product from a molten material comprising a vent assembly of claim 1.

10 17. An apparatus for forming a solid product from a molten material, the apparatus having a vent assembly, the vent assembly comprising

15 two block structures, a first of said block structures having at least one extending member which engages with at least one corresponding recess in the second block structure, the engaged block structures forming a continuous vent chamber defined between the faces of the extending member and the faces of the corresponding recess of the block structures, the faces of the extending member and corresponding faces of the recess of the block structures defining vent sections of the vent chamber which join across the width of the vent chamber, the vent assembly further comprising

20 an inlet for the vent chamber, the inlet comprising a distribution rail extending the width of the vent chamber connecting to the base of each vent section.

25 18. The apparatus of claim 17, wherein at least one extending member of the vent assembly comprises a pair of wedge main faces aligned with respect to each other at a tapered angle to form a thin end and a thick end of said wedge shaped member, a wedge end face extending between the wedge main faces at said thin end of the wedge shaped member.

19. The apparatus of claim 18, wherein at least one corresponding recess comprises a wedge shaped recess having a pair of recess main faces aligned with respect to each other at said taper angle to form a thin end and a thick end of said recess, a recess end face extending between the recess main faces at said thin end of the recess.

20. The apparatus of claim 18, wherein the block structures engage such that the wedge main face opposes corresponding recess main faces and the wedge end face opposes the recess end face to define a continuous vent chamber therebetween.

21. The apparatus of claim 16, wherein the vent assembly is connectable to a source of vacuum.

22. The apparatus of claim 16, wherein the surface of the faces of the extending member and the recess are corrugated.

23. The apparatus of claim 16, wherein the vent assembly includes a temperature control fluid gallery internal to each of the block structures.

24. The apparatus of claim 1 wherein the chill faces are provided with a surface coating to improve the performance of the surface.

25. A method of casting or moulding a material in a cavity of a die, comprising the steps of:

connecting the cavity to a vent assembly by way of a first conduit, connecting a vacuum source to the vent assembly by way of a second conduit wherein the vent assembly comprises two block structures, the first of the block structures having at least one extending member defining chill faces which engage with a corresponding recess on the second block structure, the engaged block structures forming a vent chamber within the vent assembly, the faces of the extending member and corresponding faces of the recess of the block

structures defining vent sections of the vent chamber which join across the width of the vent chamber, the vent assembly further comprising

an inlet for the vent chamber, the inlet comprising a distribution rail extending the width of the vent chamber connecting to the base of each vent section;

evacuating gas from the cavity through the first conduit vent assembly and second conduit to the vacuum source;

injecting a quantity of melt of said material into the cavity to fill the cavity, the quantity of metal at least being sufficient to fill the cavity;

permitting a portion of the quantity of the material to flow from the cavity from the first conduit into the vent assembly to solidify the material therein the material flowing into at least the base of each vent section such that the solidified material seals the vent assembly and/or first conduit;

opening the die and vent assembly by separating portions of the die and the vent assembly in a first direction;

ejecting the solidified material from the cavity and the vent assembly.

4/15

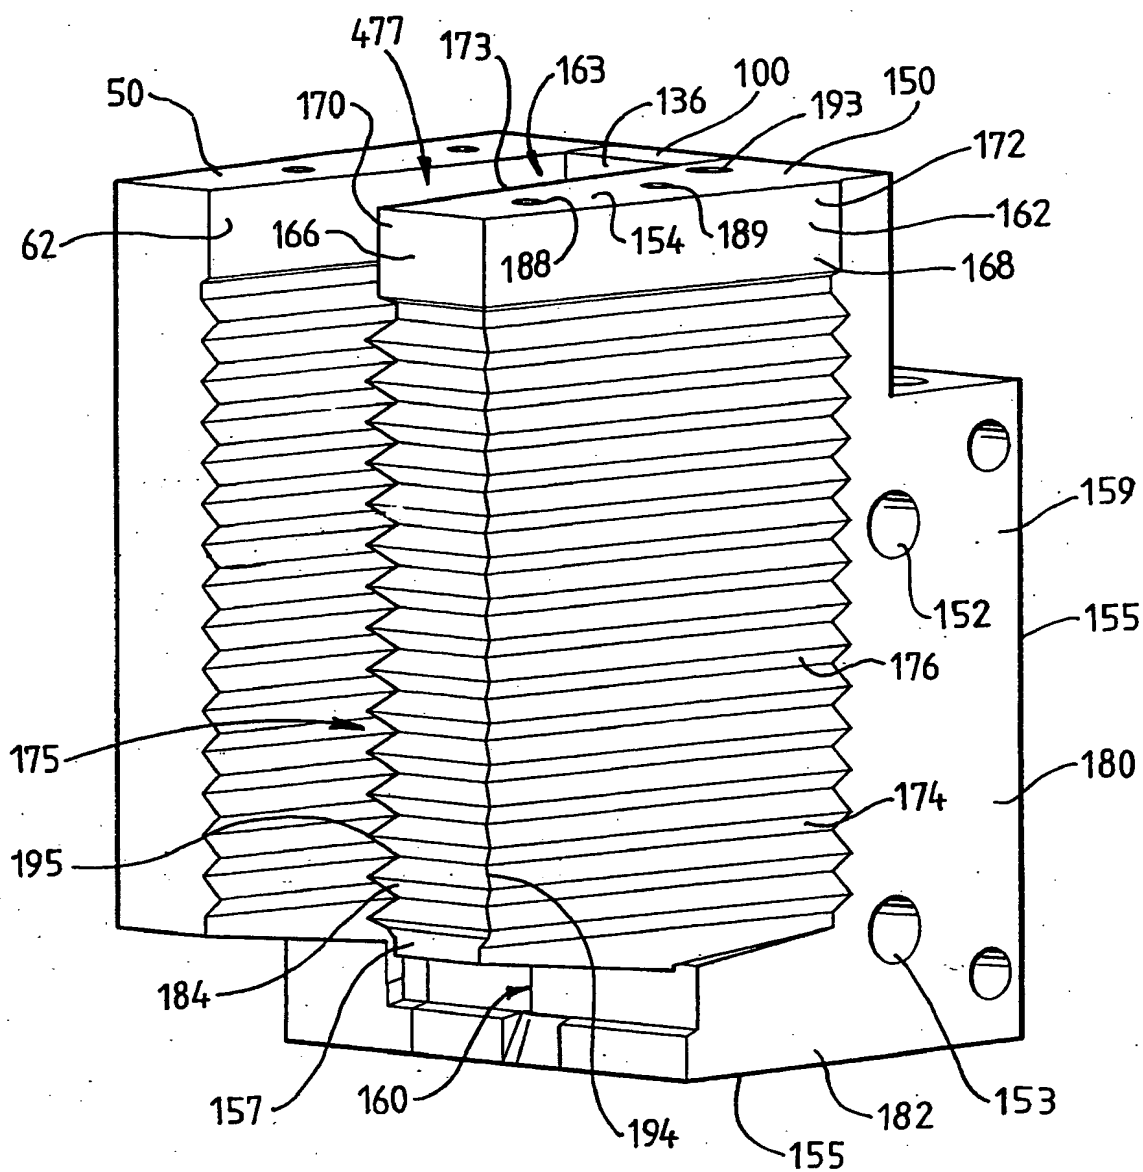


Fig. 5